


# Kodak K3ARPC Ni-MH Rechargeable Battery

Effective: January 29, 2008

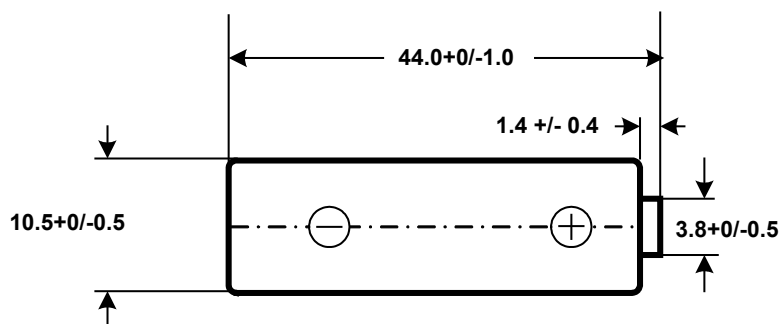

Dimensions are in millimeters and include label.

System:	Nickel-Metal Hydride, ready to use precharged battery
Designation:	ANSI 1.2H4, IEC HR03
Nominal Voltage:	1.2 Volts
Nominal Capacity:	850 mAh
Minimum Capacity:	800 mAh
Charging Condition:	85 mA for 16h
Max. Discharge:	1.6 A Continuous to 1.0 V 2.4 A Intermittent
Temperature Ranges:	
Operating	0°C to +50°C
Storage	-20°C to +30°C
Charging Approx.	0°C to +40°C
Weight:	12.5 grams
Terminals:	Flat Contacts
Jacket:	PVC Label
Internal Impedance:	0.020 Ohms (typical)
Charging Cycles:	Up to 1000. Maximum life is achieved by shallow discharge and charge conditions.

Note: This battery complies with ANSI, C18 & IEC 60086 standards

The Data in this publication represents product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. Company reserves the right to change and improve product characteristics at any time.

For more information, contact Eastman Kodak Company, 343 State Street, Rochester NY 14650-0811, Phone 1-800-242-2424

© Eastman Kodak Company, 2008

[www.kodak.com/go/batteries](http://www.kodak.com/go/batteries)

Kodak is a trademark.

**Kodak**